

EACIL20

IoT Gateway EAC Mini



KEY FEATURES


- Intel® Apollo Lake N3350 1.1 GHz
- Fanless cooling system
- Compact size 100 x 70 x 31 mm(w/o mounting bracket)
- Expansion module design
- Various mounting options: desk, wall, VESA, DIN-Rail
- AWS IoT Greengrass Certified



SPECIFICATIONS

Mechanical	
Dimension	100 (W) x 70 (H) x 31(D) mm(One layer) 100 (W) x 70 (H) x 61(D) mm(Double layer)
Enclosure	Metal Housing
Mounting	Desk Mounting & Wall Mounting VESA Mounting (Optional) DIN-Rail Mounting (Optional)
Cooling System	Fanless design
Environment	
Operating Humidity	30% to 90% (non-condensing)
Storage Temperature	-15~70°C
Vibration	Operating, IEC 60068-2-64
Operating Temperature	0~55°C
Shock	Operating, IEC 60068-2-27
IP rating	IP30
Certification	
Certification	CE, FCC Microsoft Azure Certified for IoT AWS IoT Greengrass Certified
IO Ports	
USB Port	2 x USB3.0 (Type-A)
Expansion Port	mPCIe: 1 x Full-size mPCIe slot USB Wafer : 2 x USB Wafer
Indicator	1 x LED Indicator for power
Video	1 x HDMI 1.4 (Optional)
LAN	2 x Giga LAN RJ45 Connector
mini PCIe	1 x Mini PCIE
Control	
Button	1 x Power Button 1 x Reset Button
Accessory	
Accessory	Quick Start Guide Driver CD Terminal Block 2 pin to 2.5Ø Female Adapter Cable Open Wire Cable with terminal block 2 pin connector WLAN External Antenna (For WLAN sku) WWAN External Antenna (For WWAN sku) AC to DC Adapter 12V/36W (Optional) VESA Mounting Kit (Optional) DIN Rail Mounting Kit (Optional)
Power	

DIMENSIONS UNIT:MM

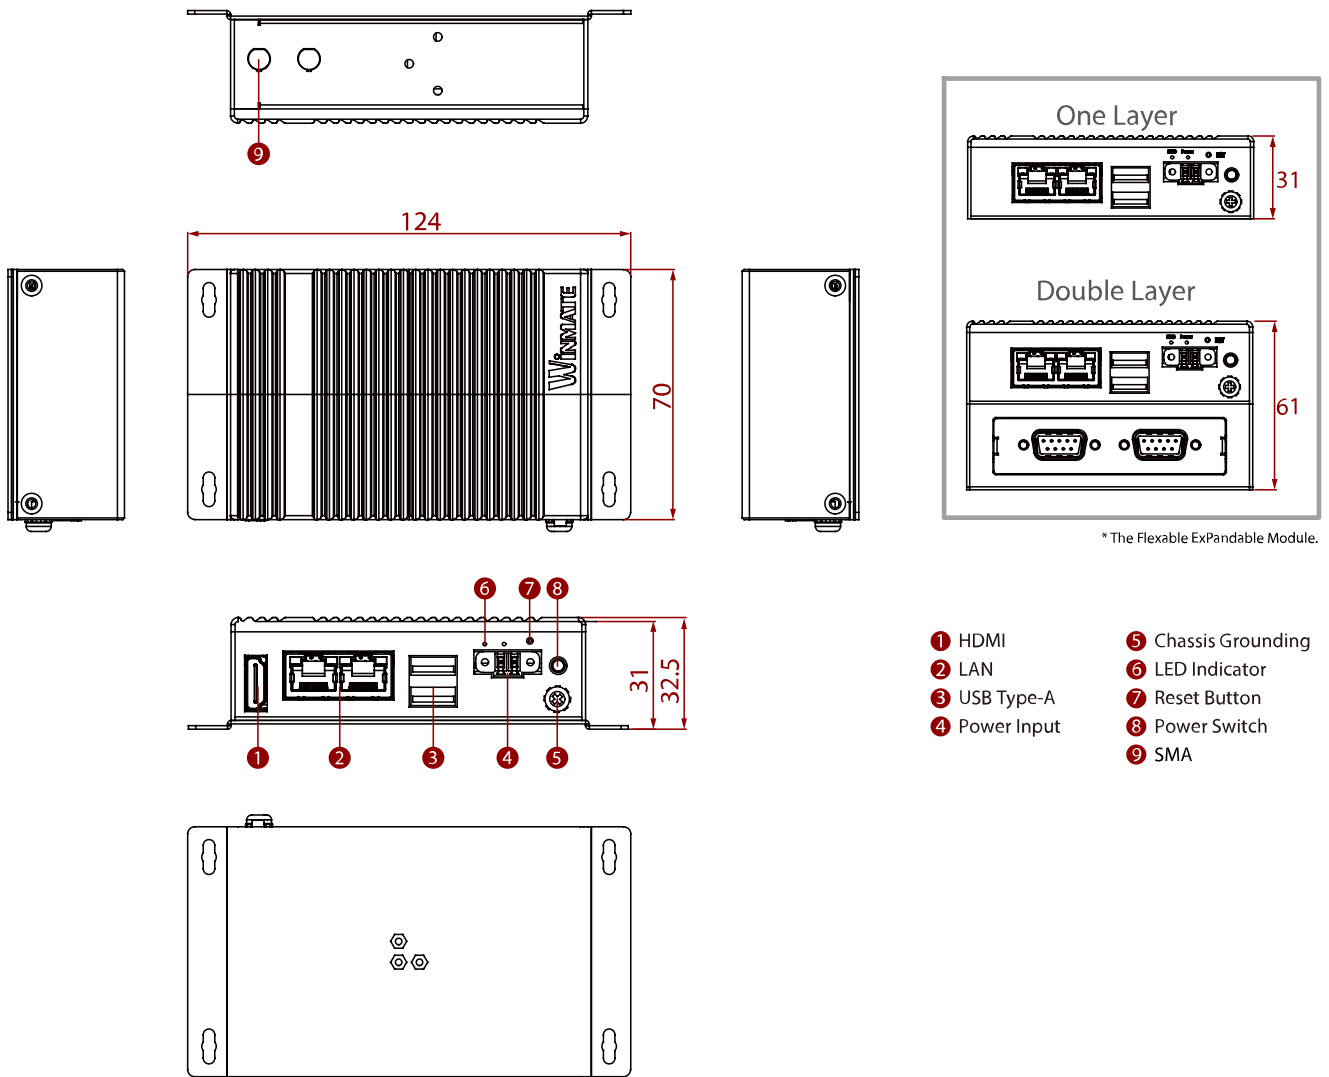

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.