

M320TF-SDI

32" 4K UHD Color Surgical Display with 12G SDI



KEY FEATURES

- 32" 4K UHD Color Surgical Display with 3840 x 2160 native resolution
- Thin and compact design with impact resistant screen, 4K UHD Color Surgical Display, 12G SDI
- 3D Look Up Table (LUT) providing rich and deep depth perception
- Fanless and ventless design, easy-to-clean
- Compatible with existing imaging systems
- Antimicrobial surface coating
- 4K Signal Input HDMI/DP/12G-SDI




SPECIFICATIONS

Display			
Touch / Glass	Projected Capacitive Multi Touch Screen AR Glass (Optional)	Resolution	3840x2160
Size	32 inches	Contrast Ratio	1000:1
Panel Brightness	350 nits 700 nits(Optional)	Display Color	1.07B Colors
View Angles	89,89,89,89	Active Area	708.48 x 398.52 mm
Environment			
Operating Humidity	10% to 90% RH, non-condensing	Operating Temperature	0°C to 35°C
Storage Temperature	-20 °C to 60 °C		
Certification			
Certification	IEC 60601-1:2005 + A1:2012 (Ed. 3.1) IEC 60601-1-6:2010 + A1:2013 (Ed. 3.1) IEC 62366:2007 + A1:2014 (Ed. 1.1) ANSI/AAMI ES60601-1:2005/A1:2012 and C1:2009/(R)2012 and A2:2010/(R)2012 CAN/CSA-C22.2 No.60601-1:14 EN 60601-1-2:2015, IEC 60601-1-2:2014 (Ed. 4.0) EN 55032/EN 55024, FCC part 15B EN 62368-1:2014 RoHS-2, REACH, WEEE compliant		
IO Ports			
USB Port	1 x USB for Touch Screen	Serial Port	1 x RS232 (Optional)
Video	1 x 12G-SDI In 1 x 12G-SDI Loop Out 1 x Display Port 1.2 1 x HDMI 1.4 (Optional) 1 x HDMI 2.0 (Optional)	Audio	2 x Speaker
Front Control	Capacitive OSD : Power On/Off, On Screen Display Menu,Enter,Brightness Control (-/+)		
Mechanical			
Dimension	777.58 x 477.62 x 48 mm	Mounting	VESA Mount

Enclosure	Metal Housing with Aluminum Bezel	Cooling System	Fanless Design
Accessory			
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	Optional Accessory	Remote Controller (Optional,Varies by product)
Power			
Power Rating	24V DC in		

DIMENSIONS UNIT:MM

32" 4K UHD 12G-SDI Color Surgica Display M320TF-SDI

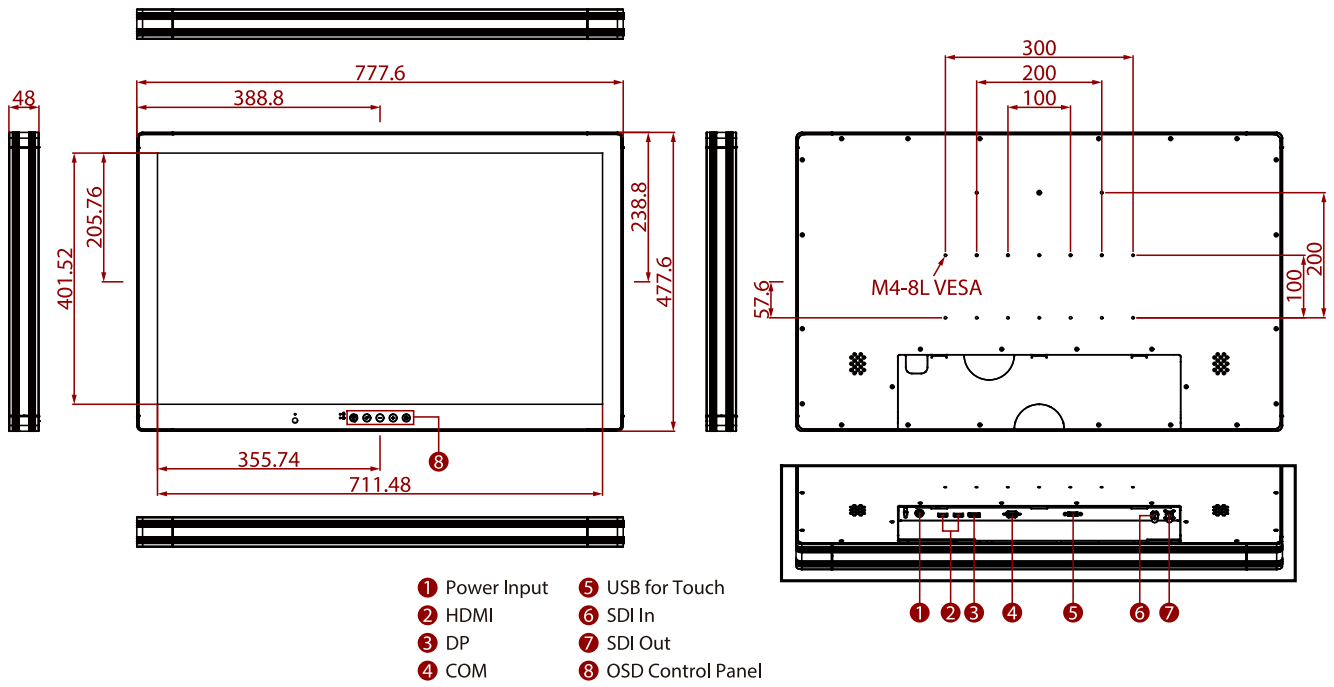

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.