

# R15IB3S-67C3ST

## 15" Intel® Celeron® N2930 IP67 Stainless Resistive Chassis Panel PC



### KEY FEATURES

- Intel® Celeron® Bay Trail-M N2930 1.83GHz Processor
- Fanless Design, 15" IP67 Stainless Resistive Chassis Panel PC
- Full IP67 dust/water resistant
- Stainless Housing with Anti-Corrosion Treatment
- Optical Bonding with Anti-moisture Treatment
- 5 Wire Resistive Touch/ Anti-Reflection Protection Glass (Optional)



### SPECIFICATIONS

Display	
<b>Resolution</b>	1024x768
<b>Contrast Ratio</b>	2000:1
<b>View Angles</b>	88,88,88,88
<b>Touch / Glass</b>	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)
<b>Size</b>	15 inches
<b>Panel Brightness</b>	300 nits
<b>Active Area</b>	304.1x228.1 mm
System Specification	
<b>Processor</b>	Intel® Celeron® N2930 (2M Cache, up to 2.16 GHz)
<b>Storage</b>	1 x mSATA SSD 64GB. mSATA SSD up to 512GB. (Optional)
<b>Operating System</b>	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (Optional) Linux Ubuntu 18.04 (Optional)
<b>Memory</b>	1 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
<b>BT</b>	Support (Optional)
<b>Ethernet controller</b>	2 x Intel® Ethernet Controller I210-AT
<b>WLAN</b>	Support (Optional)
Mechanical	
<b>Dimension</b>	383 x 310 x 57 mm
<b>Enclosure</b>	Stainless Housing
<b>Mounting</b>	VESA Mount Yoke Mount
<b>Cooling System</b>	Fanless design
Environment	
<b>Operating Humidity</b>	10% to 90% (non-condensing)
<b>Storage Temperature</b>	-20~60°C
<b>Operating Temperature</b>	0~45°C
<b>IP rating</b>	IP67
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>Power Input</b>	1 x M12 waterproof connector for 12V DC
<b>Serial Port</b>	1 x M12 waterproof connector for RS232
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for storage
<b>USB Port</b>	1x M12 waterproof connector for 2 x USB2.0
<b>LAN</b>	1 x waterproof Giga LAN RJ45 connector
Control	

**Button** 1 x Power Button  
1 x Reset Button


**Accessory**

**Accessory** 100~240V AC to DC Adapter with waterproof connector  
Power Cord  
External USB cable with waterproof connector  
External COM cable with waterproof connector  
External LAN cable with waterproof connector  
Waterproof caps  
Driver CD & Manual  
VESA screws

**Power**

**Power Rating** 12V DC (M12 type)

**DIMENSIONS** UNIT:MM

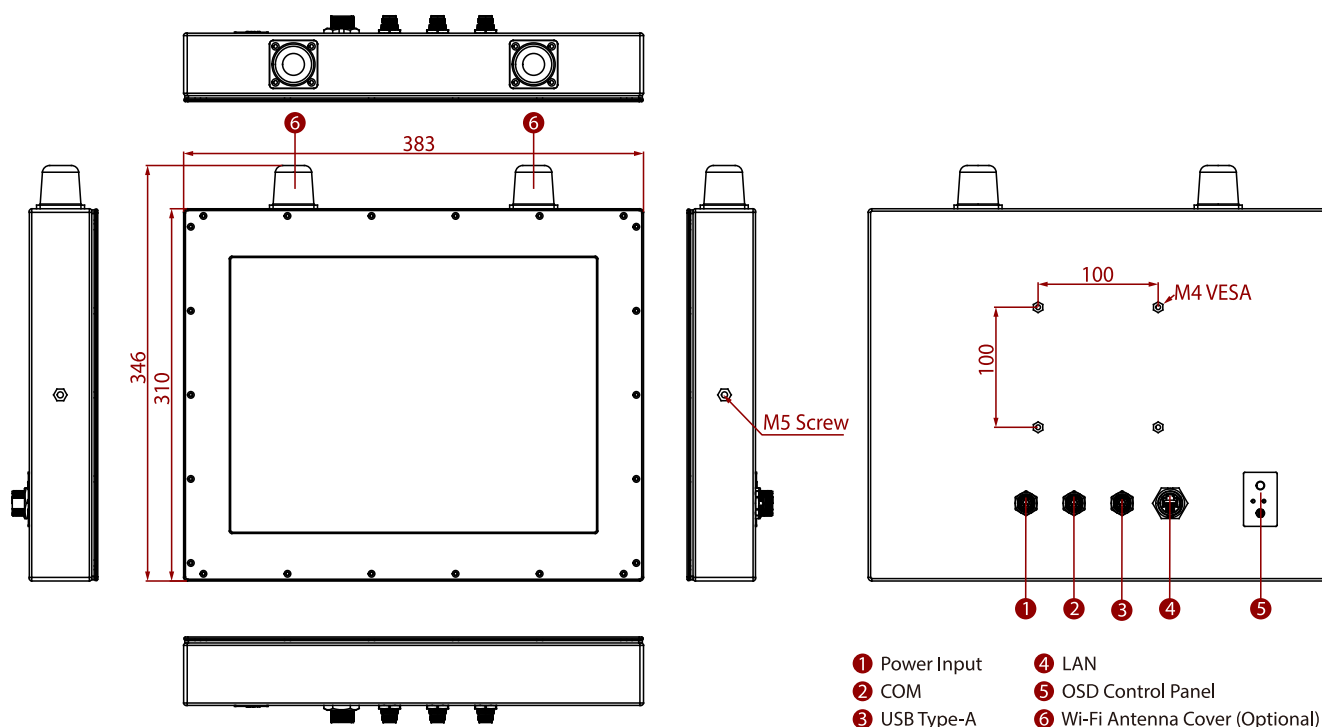

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.