

# R15L100-SDA3

## 15" SDI Chassis Display



### KEY FEATURES

- 15", 1024 x 768
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount



### SPECIFICATIONS


Display	
Resolution	1024x768
Contrast Ratio	2500:1
Display Color	16.7M Colors
Active Area	304.1x228.1 mm
Size	15.0 inches
Panel Brightness	500 nits
View Angles	88,88,88,88
Touch / Glass	Projected Capacitive Multi Touch Screen Bonding with Panel
Environment	
Operating Humidity	10% to 90% (non-condensing)
Storage Temperature	-10~60°C
Operating Temperature	0~50°C
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1 x USB for Touch Screen
Audio	2 x Speaker (Optional)
Video	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Mechanical	
Dimension	350.2 x 274.2 x 35 mm
Enclosure	Metal
Mounting	VESA Mount
Cooling System	Fanless Design
Accessory	
Accessory	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable
Power	
Power Rating	12V DC input

## Control

Button	8 key: Power Up Down Menu/Enter Left Right Exit Auto
--------	--

## DIMENSIONS UNIT:MM

### Winmate R15L100-SDA3

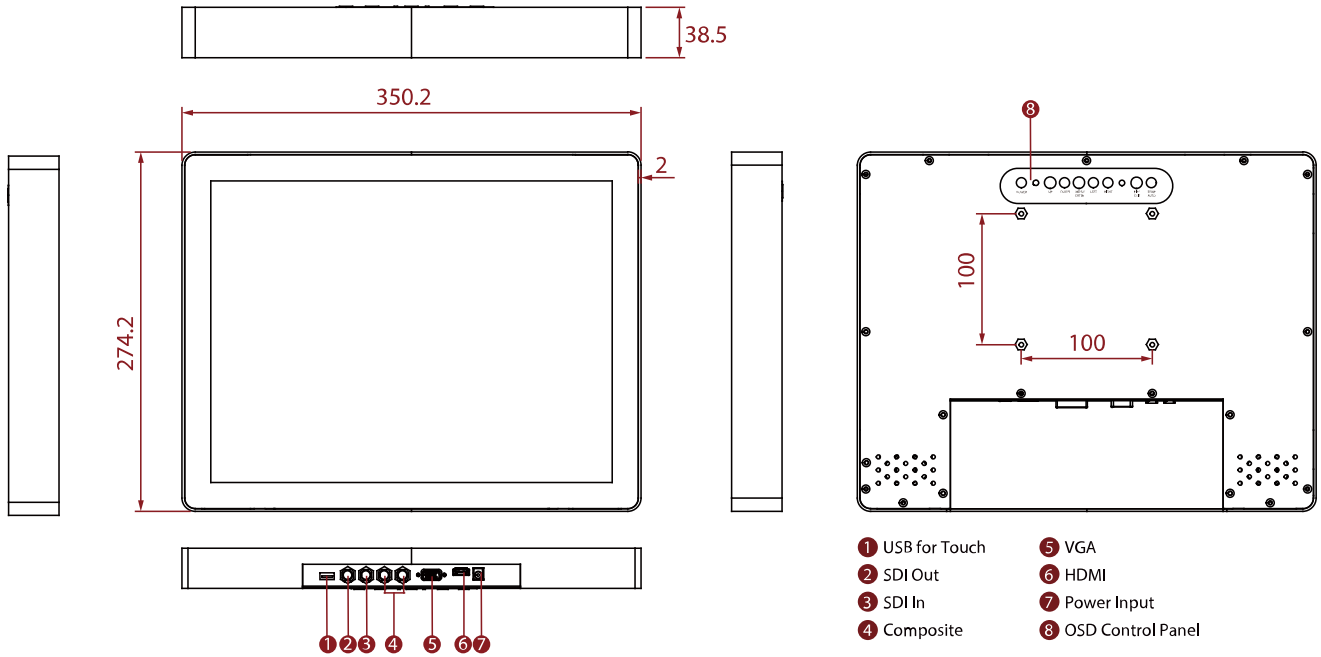

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.