

R17L100-67M1ST

17" IP67 Stainless Resistive Chassis Display



KEY FEATURES

- 17", 1280 x 1024
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP67 waterproof and dustproof



SPECIFICATIONS

Display	
Resolution	1280x1024
Contrast Ratio	1000:1
Display Color	16.2M Colors
Active Area	337.920x270.336 mm
Size	17 inches
Panel Brightness	350 nits
View Angles	85,85,80,80
Touch / Glass	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)
Mechanical	
Dimension	418 x 350 x 59 mm
Enclosure	Stainless Housing
Mounting	VESA Mount Yoke Mount
Cooling System	Fanless design
Environment	
Operating Humidity	10% to 90% (non-condensing)
Storage Temperature	-20~60°C
Operating Temperature	0~45°C
IP rating	IP67
Certification	
Certification	CE, FCC
IO Ports	
Power Input	1 x M12 waterproof connector for 12V DC
Serial Port	1 x M12 waterproof connector for touch screen control (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status
USB Port	1x M12 waterproof connector for touch screen control (Optional)
Video	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Control	
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
Accessory	
Accessory	100~240V AC to DC Adapter with waterproof connector
Optional Accessory	Yoke mount stand (Optional) External HDMI cable with waterproof connector


Power Cord
 External VGA cable with waterproof connector
 Waterproof caps
 Manual
 VESA screws

(Optional)
 External DVI cable with waterproof connector
 (Optional)
 External USB cable with waterproof connector for
 touchscreen control (Optional)
 External RS232 cable with waterproof connector
 for touchscreen control (Optional)

Power	
Power Rating	12V DC (M12 type)

DIMENSIONS UNIT:MM

Winmate R17L100-67M1ST

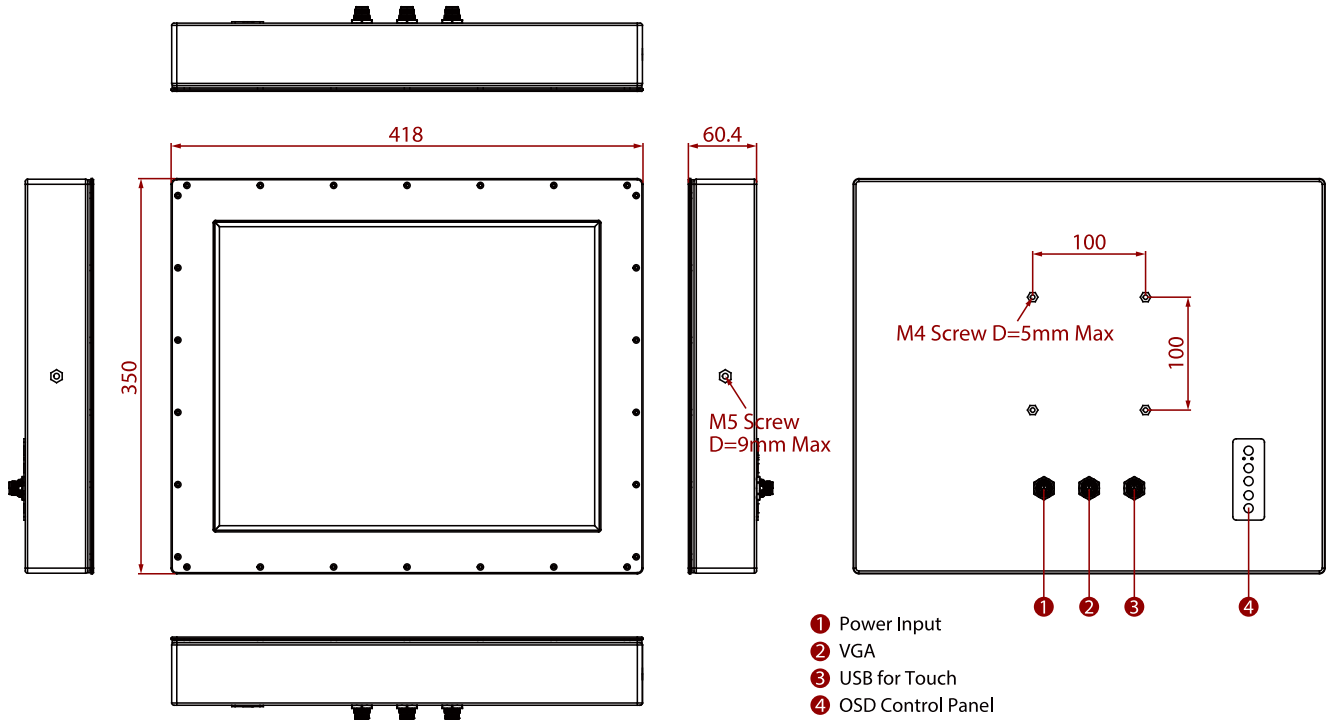

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.