

R19L300-SDA1

19" SDI Chassis Display



KEY FEATURES

- 19", 1280 x 1024 SDI Chassis Display
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- SDI Chassis Display
- VESA mount



SPECIFICATIONS


Display	
Resolution	1280x1024
Contrast Ratio	1000:1
Display Color	16.7M Colors
Active Area	376.32x301.06 mm
Size	19.0 inches
Panel Brightness	400 nits
View Angles	85,85,80,80
Touch / Glass	Projected Capacitive Multi Touch Screen
Environment	
Operating Humidity	10% to 90% (non-condensing)
Storage Temperature	-10~60°C
Operating Temperature	0~50°C
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1 x USB for Touch Screen
Audio	2 x Speaker (Optional)
Video	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Mechanical	
Dimension	438.7 x 363.5 x 38.5 mm
Enclosure	Metal
Mounting	VESA Mount
Cooling System	Fanless Design
Accessory	
Accessory	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable
Power	
Power Rating	12V DC input

Control

Button	8 key: Power Up Down Menu/Enter Left Right Exit Auto
--------	------------------------------------------------------------------------------

DIMENSIONS UNIT:MM

Winmate R19L300-SDA1

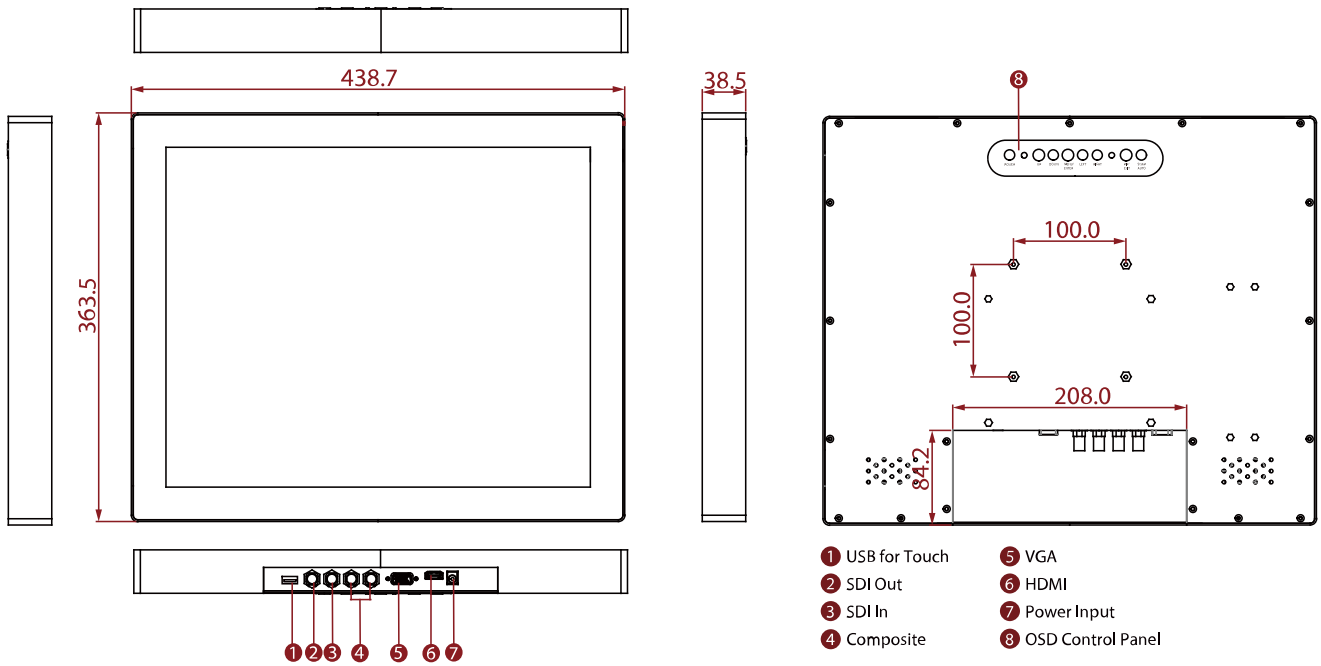

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.