


S2VD-110

LCD Scaler Board, 1920 x 1200, SDI Solution

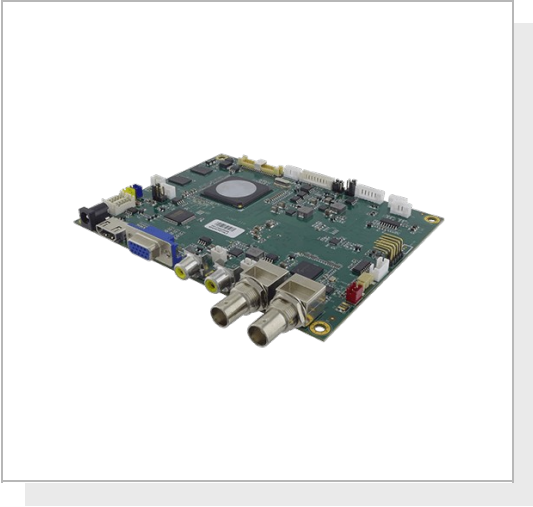

KEY FEATURES


- Support LVDS (8-bit)
- Signal Input: HDMI, VGA, CVBS, 3G-SDI input, 3G-SDI out
- 12 V DC input
- Operating Temperature 0~+50°C
- Storage Temperature -20~+60°C



SPECIFICATIONS

System			
Support Panel Interface	LVDS (8-bit)	Resolution	1920x1200
IO Ports			
Video	1 x VGA 1 x HDMI 1.4 2 x Composite 1 x 3G-SDI in 1 x 3G-SDI Out (Loop out)		
Certification			
Certification	CE, FCC		
Environment			
Operating Humidity	10% to 90% (Non-Condensing)	Operating Temperature	0~50°C
Storage Temperature	-20°C~60°C		
Power			
Power Rating	12V DC input		

DIMENSIONS UNIT:MM

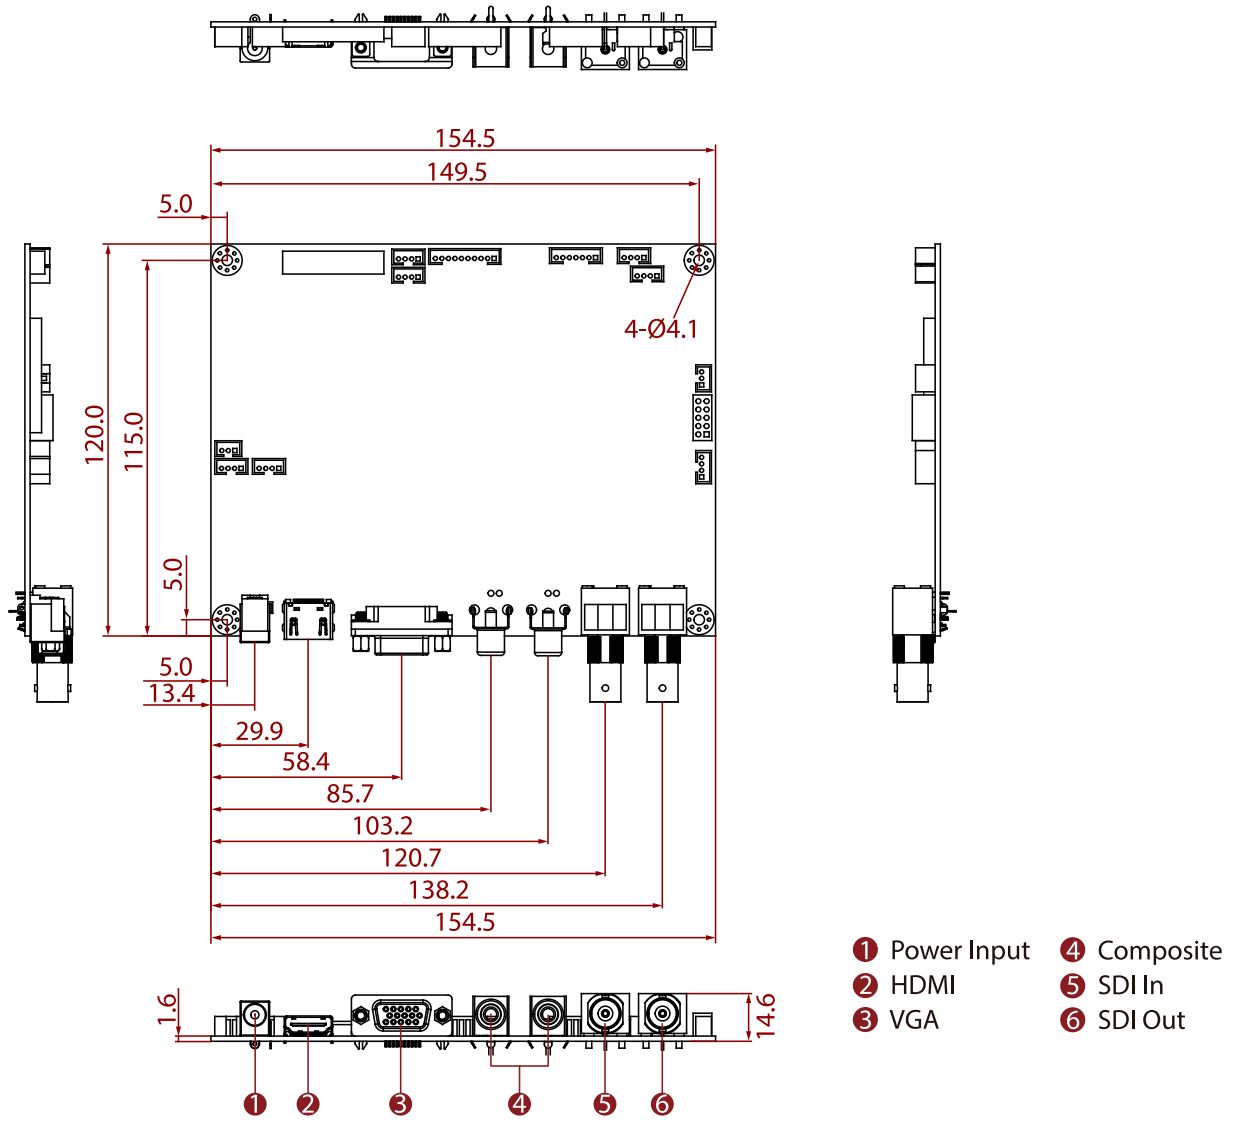

NOTE

1. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.