

# W10L100-SDH2

## 10.1" SDI Chassis Display



### KEY FEATURES

- 10.1", 1280 x 800
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount



### SPECIFICATIONS


Display	
<b>Resolution</b>	1280x800
<b>Contrast Ratio</b>	800:1
<b>Display Color</b>	16.7M Colors
<b>Active Area</b>	216.96 x135.6 mm
<b>Size</b>	10.1 inches
<b>Panel Brightness</b>	350 nits
<b>View Angles</b>	85,85,85,85
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen
Environment	
<b>Operating Humidity</b>	10% to 90% (non-condensing)
<b>Storage Temperature</b>	-10~60°C
<b>Operating Temperature</b>	0~50°C
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>USB Port</b>	1 x USB for Touch Screen
<b>Audio</b>	2 x Speaker (Optional)
<b>Video</b>	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Mechanical	
<b>Dimension</b>	263.6 x 172.3 x 38.5 mm
<b>Enclosure</b>	Metal
<b>Mounting</b>	VESA Mount
<b>Cooling System</b>	Fanless Design
Accessory	
<b>Accessory</b>	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable
Power	
<b>Power Rating</b>	12V DC input

## Control

Button	8 key: Power Up Down Menu/Enter Left Right Exit Auto
--------	--

## DIMENSIONS UNIT:MM

### Winmate W10L100-SDH2

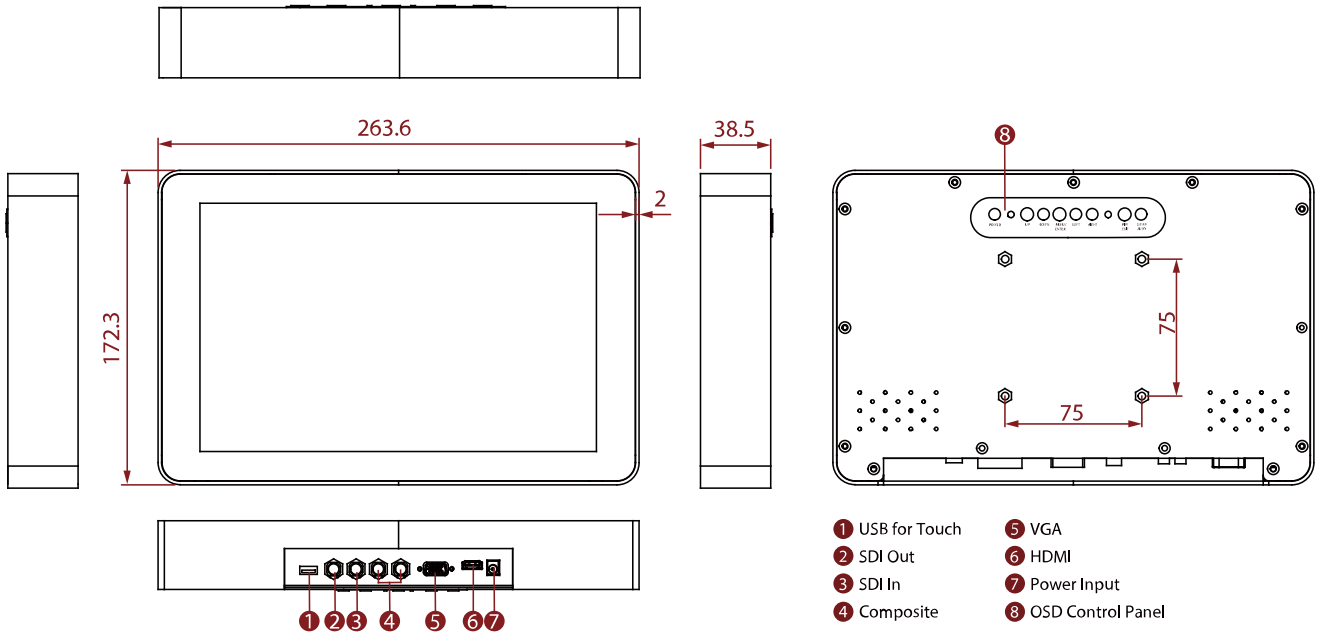

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.