

W22L100-65A3

21.5" IP65 Stainless Resistive Chassis Display



KEY FEATURES

- 21.5", 1920 x 1080
- Resistive Chassis with IP65 waterproof display
- Support VESA / YOKE mount
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



SPECIFICATIONS

Display	
Resolution	1920x1080
Contrast Ratio	3000:1
Display Color	16.7M Colors
Active Area	476.64x268.11 mm
Size	21.5 inches
Panel Brightness	250 nits
View Angles	89,89,89,89
Touch / Glass	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
Mechanical	
Dimension	550 x 340 x 58.6 mm
Enclosure	Stainless Housing
Mounting	VESA Mount Yoke Mount
Cooling System	Fanless design
Environment	
Operating Humidity	10% to 90% (non-condensing)
Storage Temperature	-20~60°C
Operating Temperature	0~45°C
IP rating	IP65
Certification	
Certification	CE, FCC
IO Ports	
Power Input	1 x M12 waterproof connector for 12V DC
Serial Port	1 x M12 waterproof connector for touch screen control (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status
USB Port	1x M12 waterproof connector for touch screen control (Optional)
Video	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Control	
Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
Accessory	
Accessory	100~240V AC to DC Adapter with waterproof
Optional Accessory	Yoke mount stand (Optional)

connector
 Power Cord
 External VGA cable with waterproof connector
 Waterproof caps
 Manual
 VESA screws


External HDMI cable with waterproof connector (Optional)
 External DVI cable with waterproof connector (Optional)
 External USB cable with waterproof connector for touchscreen control (Optional)
 External RS232 cable with waterproof connector for touchscreen control (Optional)

Power

Power Rating 12V DC (M12 type)

DIMENSIONS UNIT:MM

Winmate W22L100-65A3

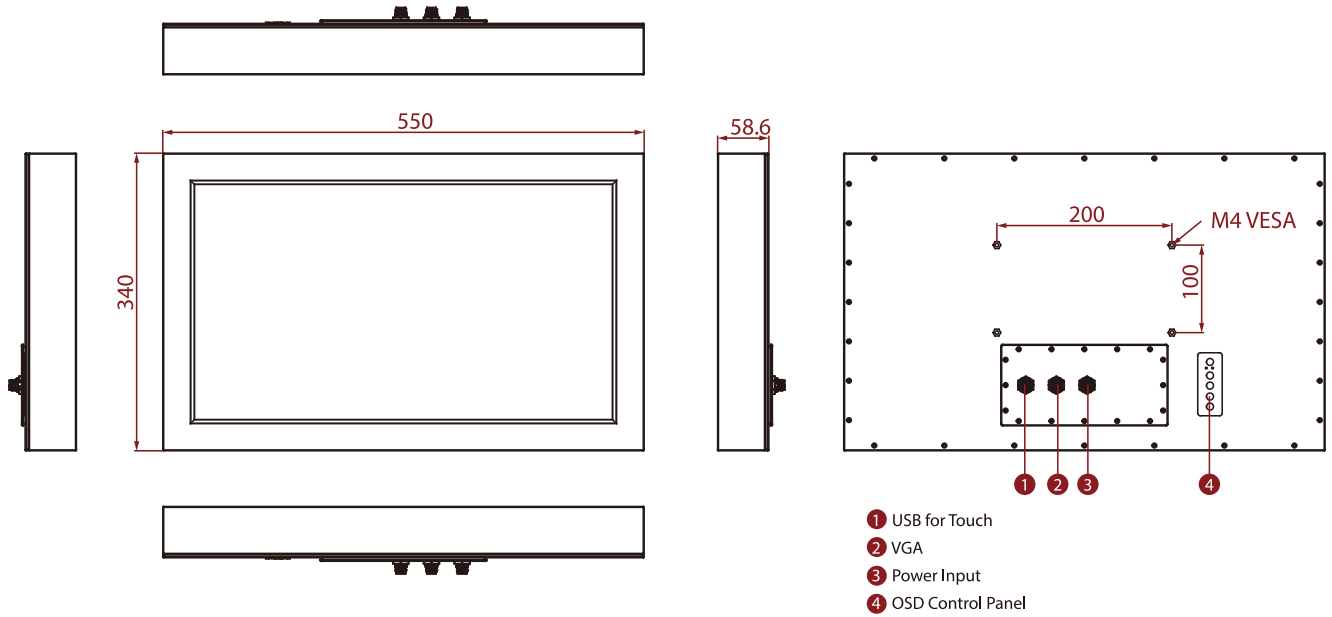

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.