

# W22L100-STA3

## 21.5" Stainless Panel Mount Display



### KEY FEATURES

- 21.5", 1920 x 1080, Stainless Panel Mount Display
- VGA and HDMI input
- Panel mount
- VESA mount
- Stainless housing SUS 316 / AISI 316



### SPECIFICATIONS

Display	
<b>Resolution</b>	1920x1080
<b>Contrast Ratio</b>	3000:1
<b>Display Color</b>	16.7M Colors
<b>Active Area</b>	476.64x268.11 mm
<b>Size</b>	21.5 inches
<b>Panel Brightness</b>	250 nits
<b>View Angles</b>	89,89,89,89
<b>Touch / Glass</b>	Resistive Touch Screen Protection Glass Without Touch Function (Optional)
Mechanical	
<b>Dimension</b>	544 x 340 x 68 mm
<b>Enclosure</b>	Stainless front bezel
<b>Mounting</b>	Panel mount VESA Mount
<b>Cooling System</b>	Fanless design
Environment	
<b>Operating Humidity</b>	10% to 90% (non-condensing)
<b>Storage Temperature</b>	-20~60°C
<b>Operating Temperature</b>	0~50°C
<b>IP rating</b>	Front IP65
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>Power Input</b>	1 x 12V DC, 2.5φ DC jack
<b>Serial Port</b>	1 x RS232 D-sub9 for touch screen control (Optional)
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for status
<b>USB Port</b>	1x USB type-A for touch screen control (Optional)
<b>Video</b>	1x VGA input 1x HDMI input (Optional) 1x DVI input (Optional)
Control	
<b>Button</b>	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button
Accessory	
<b>Accessory</b>	100~240V AC to DC Adapter Power Cord
<b>Optional Accessory</b>	External DVI Cable (Optional)


External USB Cable For Touchscreen Control  
 External VGA Cable  
 External HDMI Cable  
 Driver CD & Manual  
 VESA Screws

**Power**

**Power Rating** 12V DC input

**DIMENSIONS** UNIT:MM

**Winmate W22L100-STA3**

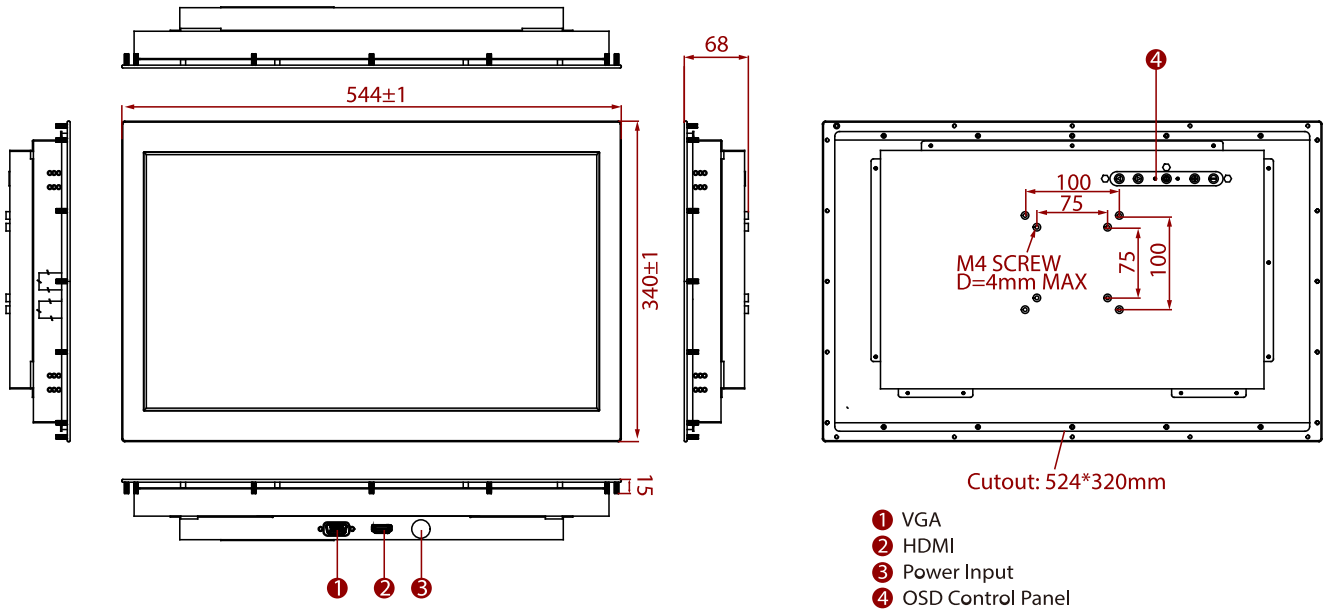

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.