

# W32L100-SDA3

## 32" SDI Chassis Display



### KEY FEATURES

- 32", 1920 x 1080, SDI Chassis Display
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount



### SPECIFICATIONS


Display			
Resolution	1920x1080	Size	32.0 inches
Contrast Ratio	4000:1	Panel Brightness	400 nits
Display Color	16.7M Colors	View Angles	89,89,89,89
Active Area	698.4 x 392.85 mm	Touch / Glass	Projected Capacitive Multi Touch Screen
Environment			
Operating Humidity	10% to 90% (non-condensing)	Operating Temperature	0~50°C
Storage Temperature	-10~60°C		
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen	Video	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Audio	2 x Speaker (Optional)		
Mechanical			
Dimension	778.6 x 475.6 x 55 mm	Mounting	VESA Mount
Enclosure	Metal	Cooling System	Fanless Design
Accessory			
Accessory	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable		
Power			
Power Rating	24V DC in		

## Control

<b>Button</b>	8 key: Power Up Down Menu/Enter Left Right Exit Auto
---------------	--

## DIMENSIONS UNIT:MM

### Winmate W32L100-SDA3

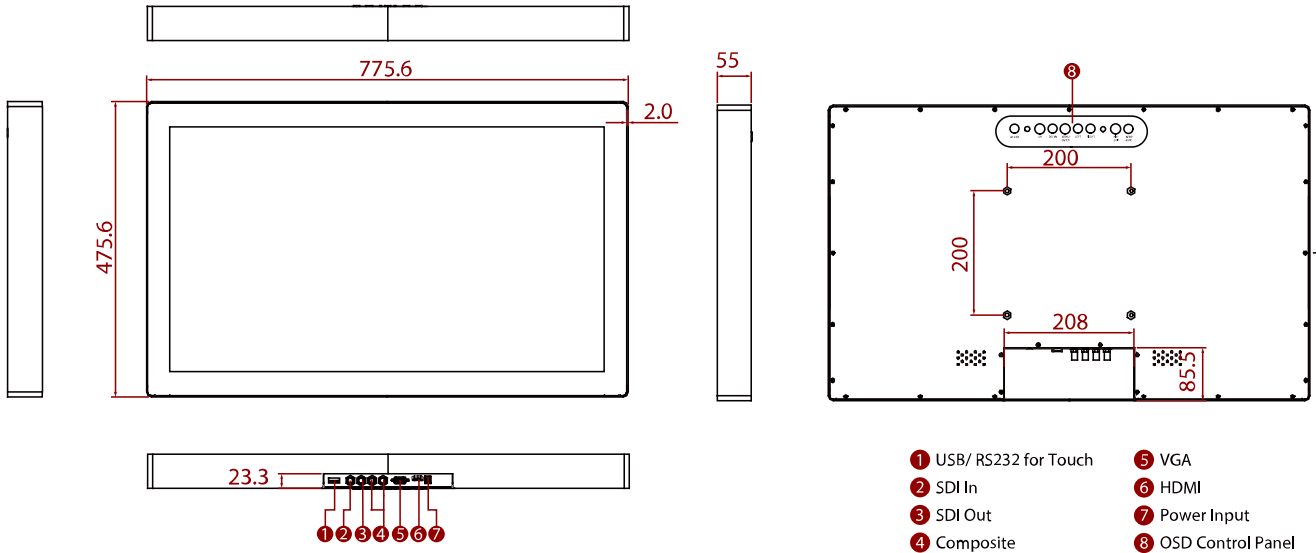

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.